





The latest in technology promotes safety and dependability through its design.

The LUI 460 eliminates the need for scaffold, scissor lifts and push around units. No ladders, no outriggers, no carrying parts, no hassles! One man (though rated for two) can easily do the job safely, quickly and efficiently.

Ready to take on the most demanding rental fleet challenges, the LUI 460 is ruggedly built and durable, while maintaining a high degree of mobility.

Its unique platform, mast and cylinder design allows an unheard of unrestricted platform capacity of 280kg, with or without the extension of both decks.



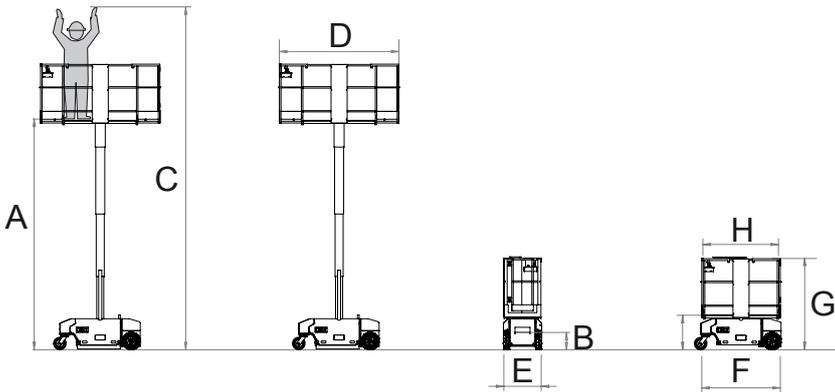

ZERO Inside Turning Radius and 1590mm Outside Turning Radius

MEASUREMENTS		
Platform Height	A	4620 mm
Entry Step	B	340 mm
Working Height	C	6620 mm
Platform Width		680 mm
Platform Length W/decks ext	D	2376 mm
Width	E	760 mm
Length Stowed	F	1560 mm
Height Stowed	G	1855 mm
Base Length	H	1659
Platform Capacity w/ decks ext		280 kg
Ground Clearance		100 mm
Rated Number of Occupants		2
PERFORMANCE		
Drive Speed Stowed		3 km/h
Drive Speed Elevated		0,6 km/h
Inside Turning Radius		Zero
Outside Turning Radius		1590 mm
Gradeability		35%
Raise/Lower Speed		25 / 16 sec
Controls		One Hand Proportional Controller
Tires		Solid Rubber, Non Marking
POWER		
Power Source		24 V c.c.
Batteries		4 -6V; 245 AH@20h
Unit Weight		1250 kg
STANDARD COMPLIANT		
		Ansi A92.6, CE Compliant, AS1418.10 (int)

Able to drive through standard doors without having to leave the platform.

With 35% gradeability, it can easily climb a ramp or over beavertails into a truck, van, or pickup.

It also features a tow hook for roll-back trucks, all accomplished while using a removable platform control box.

Wheel-locking device allows driving forward/backward in a straight line. Dual platform decks extend without sacrificing any platform capacity.

Powered by 4 TROJAN 6 volt batteries that produce a duty cycle of over 460 lift cycles or the ability to drive in excess of 9 km, then easily recharged in hours using its on-board charger. These High Amp batteries provide enough duty cycle for even the hardest of work days and more.

Large LCD readout in the ground module provides system diagnostics and status.

With its rugged ultra compact and versatile design, our one hand proportional control creates precise and safe operations and withstands all the demanding rental applications.

Platform entry is achieved using a step 340 mm off the ground and then through a single style swing gate.

Built in tilt sensor, flashing light and audible alarm are all standard features.